

Ø80mm Multiple Color LED Steady/Flashing Signal Light

SMCL80-BZ-2-24-RG-TR



SMCL80-BZ-2-24-RG-TR

PRODUCT SPECIFICATION

SMCL80-BZ-2-24-RG-TR

Materials Lens-ABS, Body-ABS,
Reflector-Heat resistant ABS

Ambient operating temperature -30°C to +50°C

Volume Max.90dB at 1m

Protection rating IP44

Flashing rate 60-80/min

Compliant with RoHS directive

- Injection machine specialized multiple color LED steady/flashing signal lights
- Injection machine specialized multi-colored LED signal lights that can choose various audible & visual signals
- This budget model uses a multiple color LED light source to provide signals in two colors
- The subdued light provides a comfortable and stable viewing condition for operation in close proximity




SMCL80-BZ-2-24-RG-TR Ø80mm Multi-Color LED Steady/ Flashing Signal Light

| Model number | Colors | Voltage | Current | Certificates | Weight | Color |
|--------------|--------|---------|---------|--------------|--------|---|
| SMCL80 | 2 | DC24V | 0.063A | - | 0.22kg | <div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; margin-right: 5px;"></div> R-Red <div style="width: 10px; height: 10px; background-color: green; margin-left: 10px; margin-right: 5px;"></div> G-Green </div> |

Technical Diagram

Units: mm

·SMCL80-BZ-2-24-RG-TR

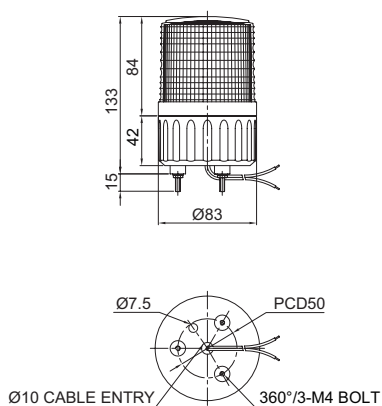


Wiring Instructions

- SMCL type can be wired with external contacts and transistor
- Wiring to transistor, use the NPN transistor. Please wire properly based on wiring instructions
- External power line standard UL1015 AWG18(0.75sq)×3C 500mm

Wiring Instructions

·SMCL80-BZ-2-24-RG-TR-DC

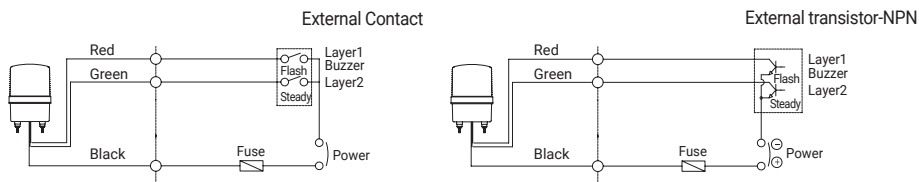

Customization

- Wall mounting bracket options :
Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket TWS80



Wall Mount Bracket TWA80

Ordering pecification

| | | | | | | | | |
|----------------|---|----------------------|---|-----------|---|-----------|---|---|
| SMCL80 | - | BZ | - | 3 | - | 24 | - | RG |
| [Model number] | | [Buzzer option] | | [Color] | | [Voltage] | | [Color] |
| SMCL80 | | BZ - Built-in buzzer | | 2-2colors | | 24-DC-24V | | <div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; margin-right: 5px;"></div> R-Red <div style="width: 10px; height: 10px; background-color: green; margin-left: 10px; margin-right: 5px;"></div> G-Green </div> |