

1 2 3 4 5 6

A

B

C


D

A

B

C

D

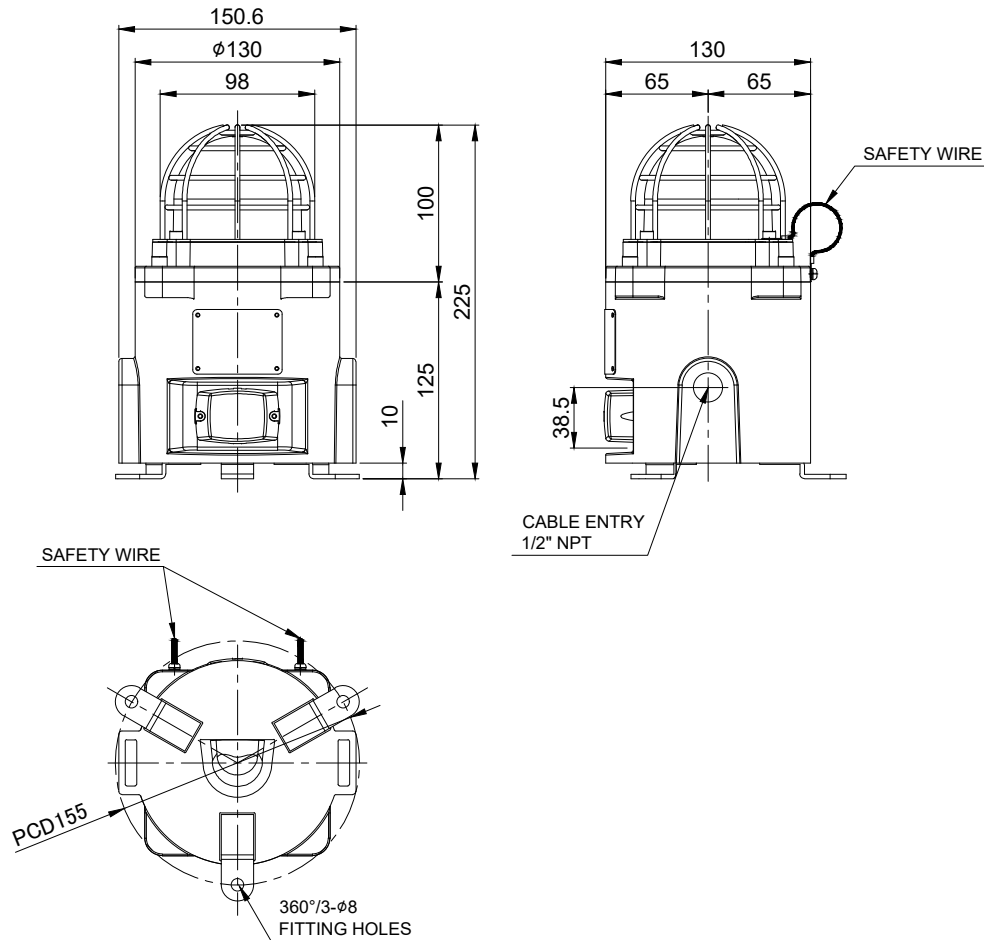

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			QNES			
MATERIAL			HOUSING-AL			
			LENS-TEMPERED GLASS			
			PROTECTION CAGE-SUS316L			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE()			
FLASHING PER MIN.			FLASHING - 60~80			
			LED STROBE - 70~80			
			LED ROTATE - 60~80			
USE VOLT.	LED	CURRENT	DC12~24V	0.2W	MAX. 1.872A	
			AC110~230V		MAX. 0.301A	
VOLUME			MAX. 110dB			
PROTECTION GRADE			WATER & DUST PROOF IP66			
CABLE ENTRY			1/2" NPT			
COLOR OF HOUSING			RED			
ACTION			LED STEADY / FLASHING / STROBE / ROTATE			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		Y.H.JOO			J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4							
	0~10	±1°		±1°30'	±3°		QNES		MODEL			
	10~50	±0°30'		±1°	±2°		OUTLINE DRAWING		QNES			
	50~120	±0°20'		±0°30'	±1°		Qlight		QNES_OUT			
	120~400	±0°10'		±0°13'	±0°30'				SCALE	SIZE	REV	SHEET
									N/S	A4	00	1/1

1 2 3 4 5 6

A4(297X210)