

1 2 3 4 5 6

A

A

B


B

C

C



D

D

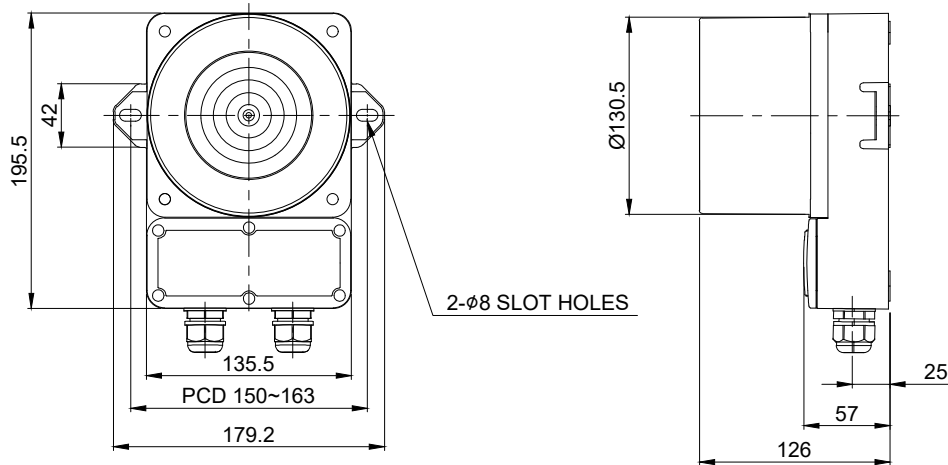



MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO		QWH35T	
MATERIAL		HORN-PC+ABS	
		HOUSING-PC+ABS	
		-	
USE VOLT.	CURRENT	DC12V ~ 24V	MAX. 0.930A
		AC110V ~ 220V	MAX. 0.300A
CHANNEL		BIT INPUT	5CH (ONLY SD-CARD)
		BINARY INPUT	31CH
KIND OF SOUND	VOLUME	WARNING SOUNDS 31Ch	MAX. 115dB at 1m
		MP3 SOUNDS	MAX. 113dB at 1m
PROTECTION GRADE		WATER & DUST PROOF - IP66	
CABLE ENTRY		CABLE GLAND "PG13.5" x 2	
COLOR OF HOUSING		MAKER STANDARD	

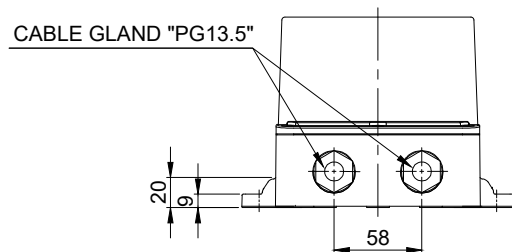

FITTING HOLES

ISO2768-1 : CLASS OF TOLERANCE						-						
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v	Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY C.S.GWAK	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2021.10.08	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
TITLE QWH35T OUTLINE DRAWING									MODEL QWH35T			
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. QWH35T_OUT			
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							
						SCALE 1/1	SIZE A4	REV 01	SHEET 1/1			

A4(297X210)