




1 2 3 4 5 6

A

B

C

D

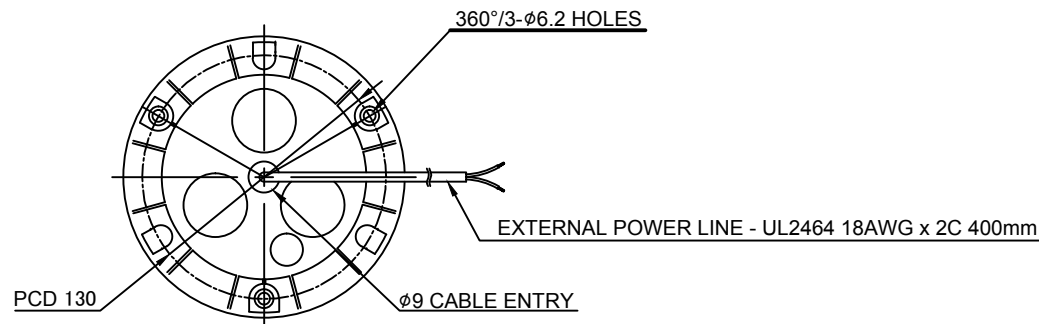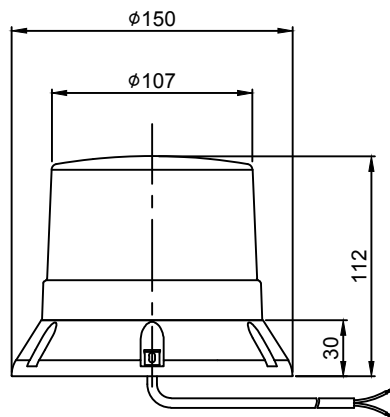

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				



MODEL NO		QA115LSE	
MATERIAL		LENS-PC	
		HOUSING-PC	
		-	
COLOR OF LENS		AMBER	
FLASHES PER MIN.		60 ~ 80	
USE VOLT.	CURRENT	DC12V ~ 24V	MAX. 1.000A
PROTECTION GRADE		WATER & DUST PROOF IP66	
CABLE ENTRY		ø9 LEAD HOLE	
COLOR OF HOUSING		MAKER STANDARD	
ACTION		LED LAMP STROBE LIGHT	
USER SPECIFICATIONS		PROTECTION CAGE	

A

B

C

D

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY J.H.PARK	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. QA115LSE_OUT			
	10~50	±0°30'		±1°	±2°				SCALE N/S	SIZE A4	REV 00	SHEET 1/1
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							
						QA115LSE OUTLINE DRAWING			QA115LSE			

1 2 3 4 5 6 A4(297X210)