

A

B

C

D

A


B

C

D

QTC(A)70L-USB-BZ

QTC(A)70ML-USB-BZ

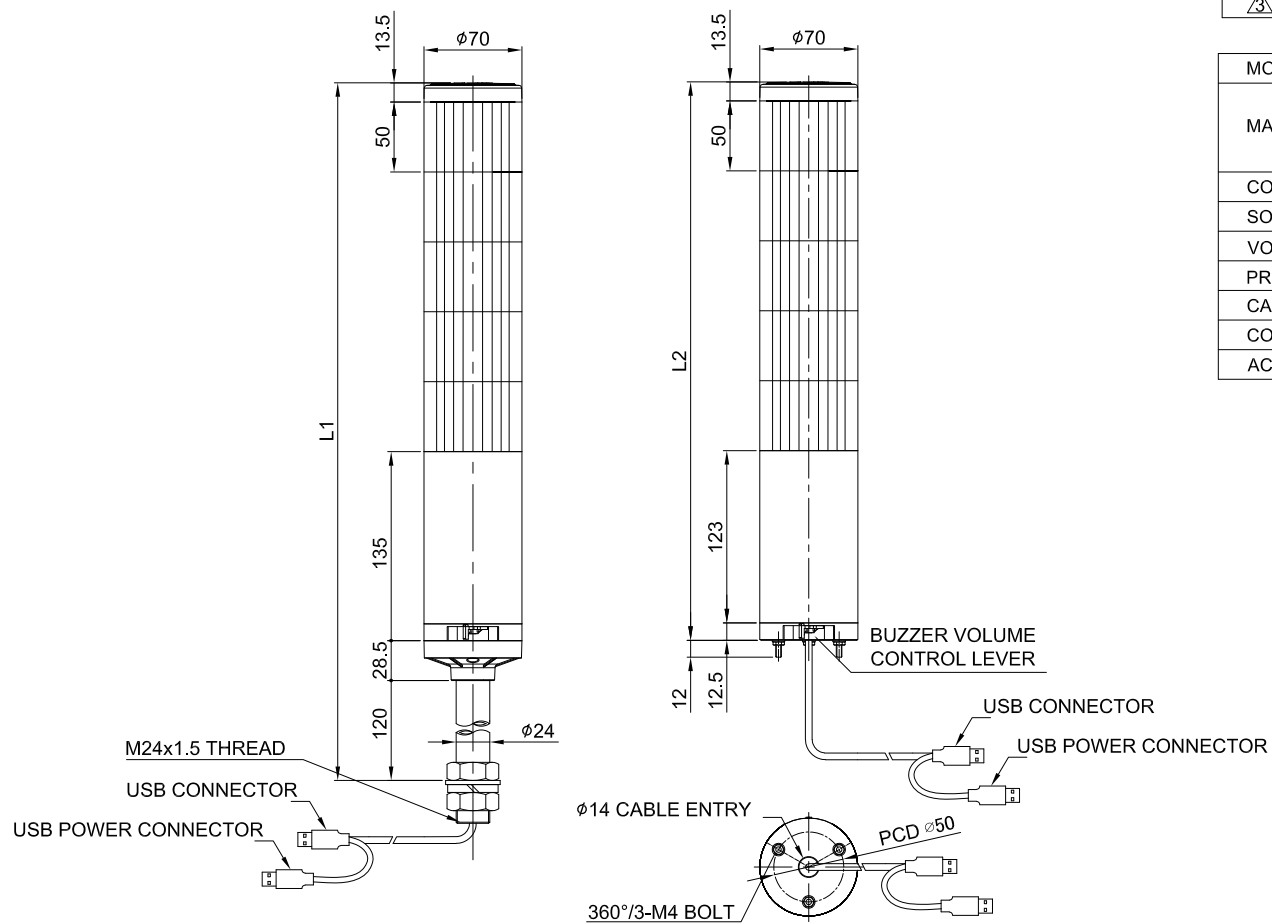

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO	QTC(A)70(M)L-USB
MATERIAL	HOUSING-ABS
	LENS-PC
	PIPE-AL
COLOR OF LENS	RED(), AMBER(), GREEN(), BLUE(), WHITE()
SOUND	BZ 5 Buzzer sounds
VOLUME	MAX. 90dB at 1m
PROTECTION GRADE	WATER & DUST PROOF IP65 (BZ TYPE-IP54)
CABLE ENTRY	φ14 LEAD HOLE
COLOR OF HOUSING	MAKER STANDARD
ACTION	LED STEADY / FLASHING LIGHT

LAYER	L1	L2
1	357	199
2	407	249
3	457	299
4	507	349
5	557	399

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS	0.5~3	f	m	⌀	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	3~6	±0.05	±0.1	±0.2	±0.5			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	6~30	±0.1	±0.2	±0.5	±1			J.H.PARK	J.H.PARK		J.K.HAN	3	2019.07.10
	30~120	±0.15	±0.3	±0.8	±1.5			TITLE			MODEL		
	120~400	±0.2	±0.5	±1.2	±2.5			QTC70(M)L-USB			QTC70(M)L-USB		
	400~1000	±0.3	±0.8	±2	±4			OUTLINE DRAWING			QTC70(M)L-USB_OUT		
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°						DWG. NO.		
	10~50	±0°30'		±1°	±2°						QTC70(M)L-USB_OUT		
	50~120	±0°20'		±0°30'	±1°			SCALE			SIZE	REV	SHEET
	120~400	±0°10'		±0°13'	±0°30'			N/S			A4	00	1/1

A4(297X210)