



PRODUCT SPECIFICATION

SK | SKM
SKMP | SKMPLR

Materials Lens-PC, Housing-PC, Reflector-PC/STS

Ambient operating temperature -20°C to +50°C

Protection rating IP54

Revolving speed 120-140RPM

- Adopts a special Power transmission system that reduces noise and wear
- Metal body structure inside the cover gives the product a stylish look
- Contains a spare bulb inside the product



SK / SKH

SK / SKH Streamlined Bulb Revolving Warning Lights

Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
SK	DC12V	1.544A	12V15W	G23 15S	17	-	0.54kg	● R-Red
	DC24V	0.766A	24V15W	G23 15S	18		0.54kg	● A-Amber
SKH	DC12V	3.600A	12V35W	15S halogen	39		0.54kg	● G-Green
	DC24V	1.850A	24V35W	15S halogen	40		0.54kg	● B-Blue

· SKH: Features super-bright high intensity with 35W halogen bulb

SKM / SKMH Streamlined Bulb Revolving Warning Lights

Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
SKM	DC12V	1.544A	12V15W	G23 15S	17	-	0.58kg	● R-Red
	DC24V	0.766A	24V15W	G23 15S	18		0.58kg	● A-Amber
SKMH	DC12V	3.600A	12V35W	15S halogen	39		0.59kg	● G-Green
	DC24V	1.850A	24V35W	15S halogen	40		0.59kg	● B-Blue

· 4 strong magnets enable secure attachment to the vehicle

· SKH: Features super-bright high intensity with 35W halogen bulb




SKM / SKMH


Technical Diagram

Units: mm

·SK / SKH

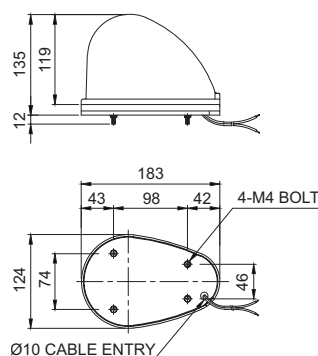

·SKM / SKMH

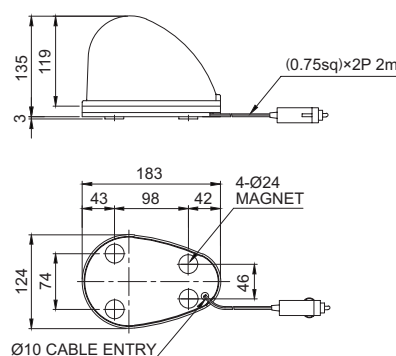

A spare bulb inside the SK Series allows for immediate bulb replacement when damaged.

Ordering Specification

SKMH	-	24	-	R
[Model number]		[Voltage]		[Color]
SK		12-DC12V		● R-Red
SKH		24-DC24V		● A-Amber
SKM				● G-Green
SKMH				● B-Blue

Wiring Instructions

- Cigarette lighter plug, IEC42(0.75sq) x 2P 2m