


LAYER	L
1	162
2	256
3	350

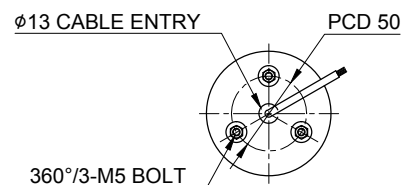

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			SRL			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			REFLECTOR-HEAT RESISTING ABS			
COLOR OF LENS			RED(), AMBER(), GREEN()			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.125A	LAYER1
			DC24V			LAYER2
			AC110V		0.065A	LAYER3
			AC220V		0.030A	LAYER4
PROTECTION GRADE			WATER & DUST PROOF IP44			
CABLE ENTRY			ø13 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/FLASHING SIGNAL TOWERS			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1			TITLE SRL OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5			MODEL SRL					
	120~400	±0.2	±0.5	±1.2	±2.5			DWG. NO. SRL_OUT					
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4			SCALE N/S					
	0~10	±1°		±1°30'	±3°			SIZE A4					
	10~50	±0°30'		±1°	±2°			REV 00					
	50~120	±0°20'		±0°30'	±1°			SHEET 1/1					
	120~400	±0°10'		±0°13'	±0°30'								

