


LAYER	L
1	363
2	457
3	551

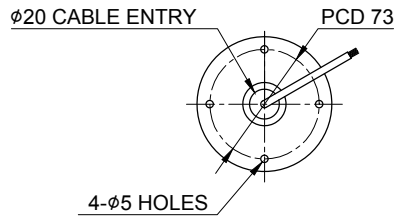

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			SRLP			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			REFLECTOR-HEAT RESISTING ABS			
COLOR OF LENS			RED(), AMBER(), GREEN()			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V ~ DC24V	0.08W	MAX. 0.125A	LAYER1
			AC110V		0.065A	LAYER1
			AC220V		0.030A	LAYER1
			PROTECTION GRADE			WATER & DUST PROOF IP44
CABLE ENTRY			ø20 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/ FLASHING SIGNAL TOWERS			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-		1		-	
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1			SRLP OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4			MODEL SRLP					
	0~10	±1°	±1°30'	±3°				DWG. NO. SRLP_OUT					
	10~50	±0°30'	±1°	±2°				SCALE N/S					
	50~120	±0°20'	±0°30'	±1°									
	120~400	±0°10'	±0°13'	±0°30'									

