

## CPK-RS485



CPK-RS485

## PRODUCT SPECIFICATION

CPK-RS485

Materials ABS

Ambient operating temperature -25°C to +50°C

Volume Max.85dB at 1m

Protection rating IP65

Compliant with RoHS directive

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio harmony by applying industrial RS485 communication
- Up to 255ea of frame IDs can be set by software manager
- Can select and play 255 songs using RS485 communication
- Save MP3 sound source using USB C-TYPE cable
- Supports 128Mbyte storage capacity (File format: FAT)
- Supports 4 communication speeds: 9600bps, 19200bps, 38400bps, 115200bps

### CPK-RS485 Signal phone for RS485 communication panel

| Model number | Sound type               | Volume   | Voltage   | Current        | Certificates | Weight |
|--------------|--------------------------|----------|-----------|----------------|--------------|--------|
| CPK-RS485    | MP3 File<br>(255 Sounds) | Max.85dB | DC12V-24V | Max.<br>0.600A | CE           | 0.21kg |


※ DC type model has a free-voltage range of 10V-36V

※ When playing MP3 files, there may be difference of volume depending on user's audio file type.

### Technical Diagram

-CPK-RS485


Units: mm

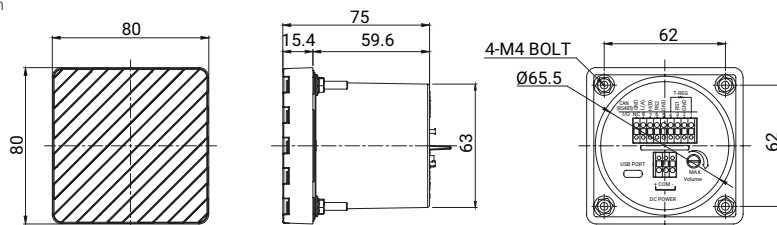

Terminal box for Signal phone  
for RS485 communication  
panel(back side)

### Wiring Instructions

-CPK-RS485

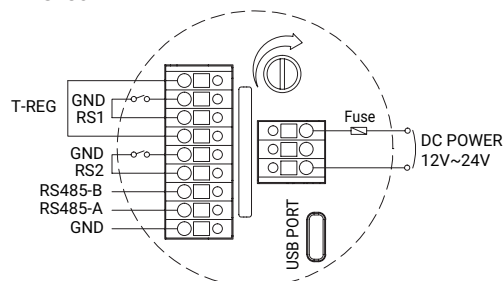

### Ordering Specification

CPK-RS485

[Model number]

CPK-RS485

12/24

[Voltage]

12/24-DC12V-24V