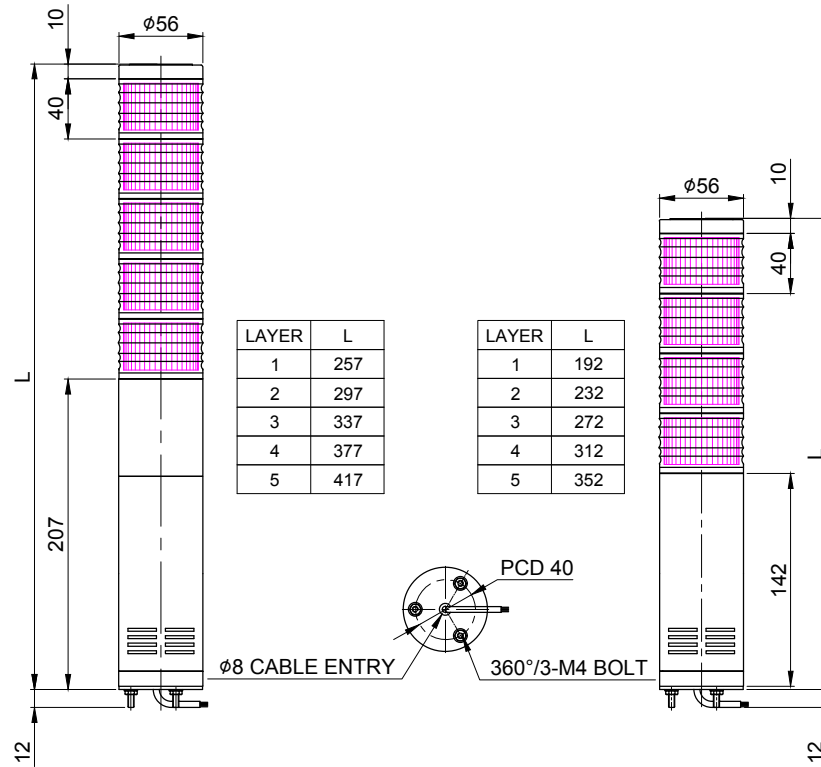




ST56MEL-W□ : AC
ST56MELF-W□ : AC

ST56MEL-W□ : DC
ST56MELF-W□ : DC



MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			ST56MEL-W			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			-			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	0.060A	LAYER1
			DC24V		0.040A	LAYER1
			AC110V		0.044A	LAYER1
			AC220V		0.022A	LAYER1
KIND OF SOUND			WS	5 Pre-Recorded Warning Sounds		
			WM	5 Pre-Recorded Melodie		
			WA	5 Pre-Recorded Alarms		
VOLUME			MAX. 85dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP23			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/ FLASHING TOWER LAMP			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QT'Y
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	3~6			±0.3	±0.5	S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20	
	6~30	±0.1	±0.2	±0.5	±1	TITLE			MODEL			
	30~120	±0.15	±0.3	±0.8	±1.5	ST56MEL-W OUTLINE DRAWING			ST56MEL-W			
	120~400	±0.2	±0.5	±1.2	±2.5				DWG. NO.			
400~1000	±0.3	±0.8	±2	±4	ST56MEL-W_OUT							
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	SCALE		SIZE	REV	SHEET		
	10~50	±0°30'		±1°	±2°	N/S		A4	00	1/1		
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							

Qlight

A4(297X210)